


TECHNISCHE VERLICHTING

LEDKLOKKEN

BEAM 0514 - 0516 - 0517

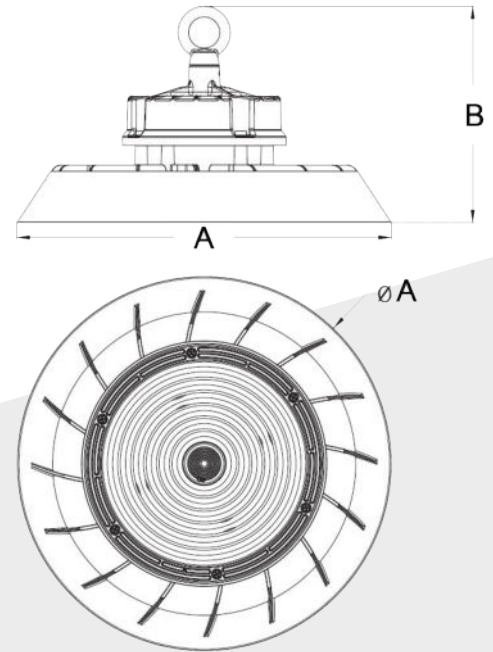

Beam 0514/160

(A) Ø 270 x (B) 157,76mm

100W

16.000Lm

49 87 98 100 1000

Beam 0516/160

(A) Ø 290 x (B) 167,78mm

150W

24.000Lm

54 89 98 99 100

Beam 0517/160

(A) Ø 320 x (B) 172,38mm

200W

32.000Lm

56 89 98 99 100

De ledklokken zijn energiezuinig, hebben een aluminium behuizing en zijn geschikt voor gebruik in vochtige ruimtes. Ze hebben een 1-10V dimbare driver, G5-technologie en een uniek koellichaam uit één geheel.

- 160Lm/W
- PF >0,95
- 4000K
- CRI >80
- Stralingshoek 120°
- IP65
- LIFUD-driver
- LB-factor: L80 B10

Ook verkrijgbaar in DALI-versie:

- Beam 0514/160 DALI
- Beam 0516/160 DALI
- Beam 0517/160 DALI

